

TICO®
**HIGH-PERFORMANCE LEAD-FREE
ALTERNATIVE**





**TICO®
DEVELOPS FULL COLOR SATURATION
AND HIGH GLOSS, LOW DUSTING
PROPERTIES AND ARE EASY TO
DISPERSE**

THE IDEA BEHIND TICO®


TICO®s are a new class of high-performance yellow, orange and red pigment preparations.


These titanium based colorants exhibit maximum gloss, opacity, strength and durability, which cannot be achieved with today's well established blends of organic High-Performance Pigments and white/yellow titanium or bismuth vanadate pigments.

TICO® stands for Titanium Color made by a proprietary co-finishing process to attach the organic colorants to the surface of titanium carrier pigments.

As a result TICO®s develop full color saturation and high gloss, low dusting properties and are easy to disperse.



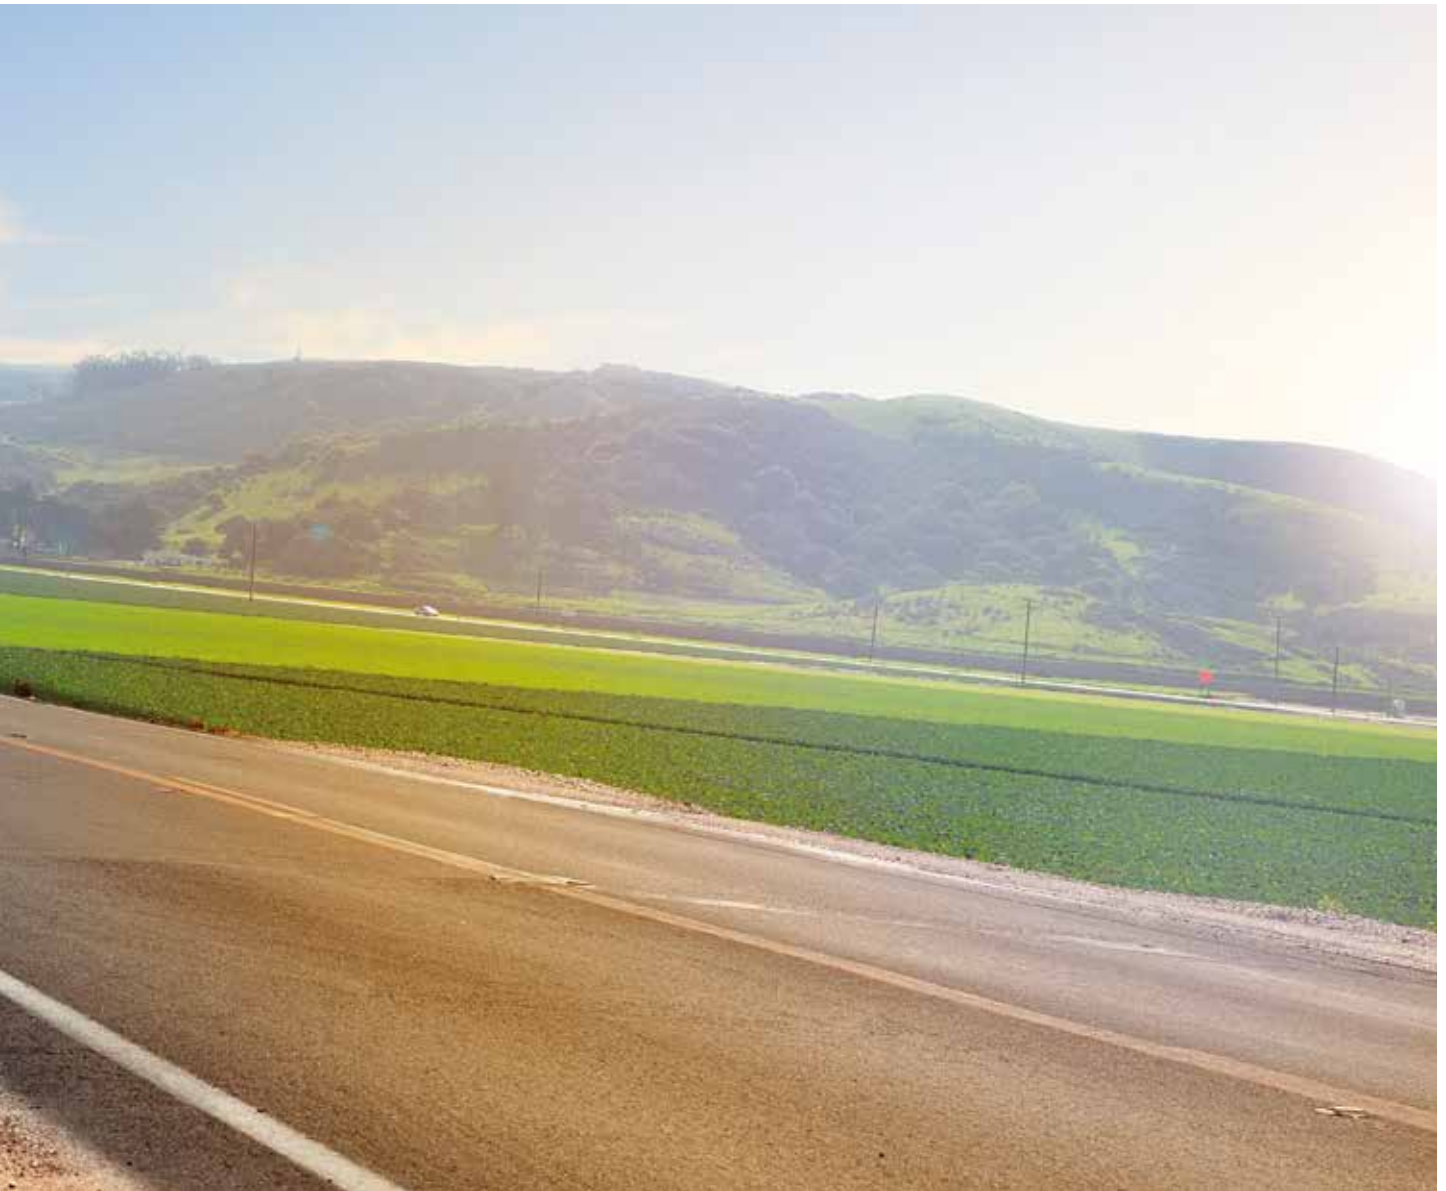


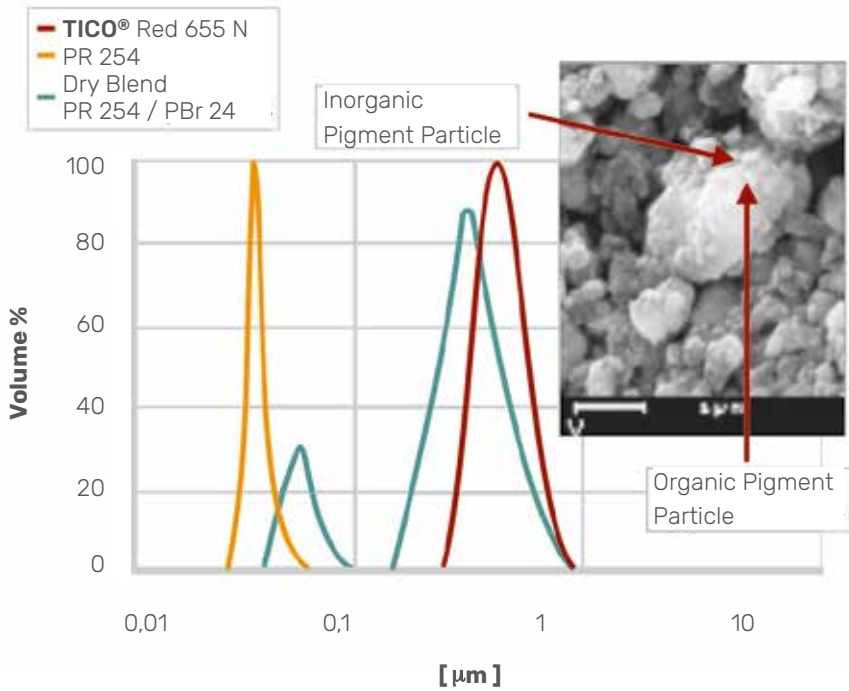

Monomodal particle size distribution of TICO® Red 655 N

PIGMENT MORPHOLOGY

TICO® hybrid pigments are a combination of a specially micronized complex inorganic color pigmentary core particle and a predispersed organic colorant attached to the surface of the core particle.

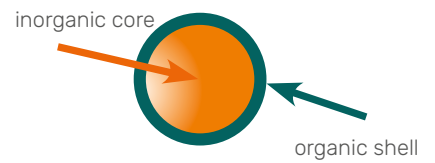

REGULATIONS

The regulatory affairs sheet with detailed informations on compliant regulations of TICO® hybrid pigments is available on request.

TICO® COLOR SPACE


The enhancement of chromaticity is an inherent characteristic of the TICO® pigment technology. The TICO® color space comprises the yellow, orange and red pigment preparations.


APPLICATION AREAS

TICO® hybrid pigments can be used with the majority of the commonly used binder types. The main application areas are:

- > Automotive Coatings
- > General Industrial Coatings
- > Plastics

TICO® Range - CIELab Color Space

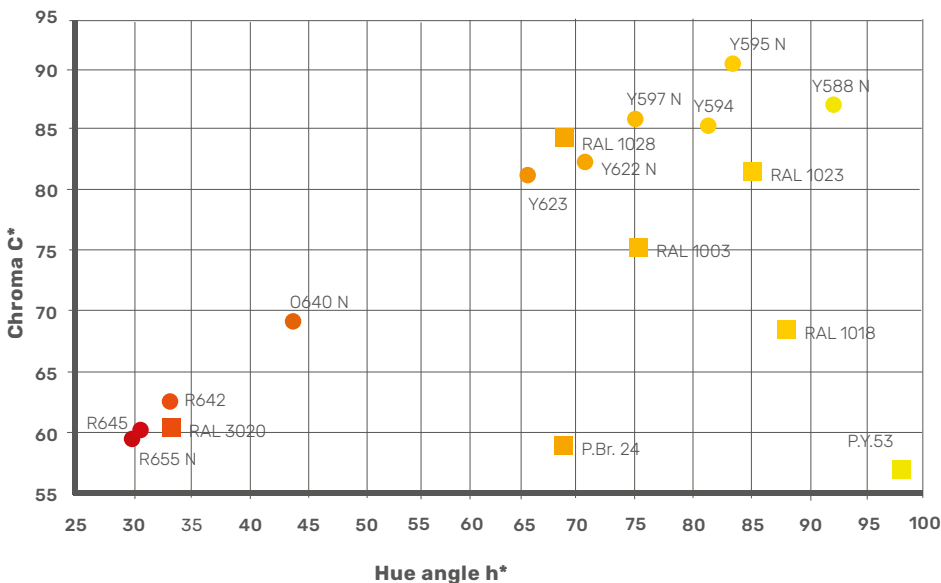

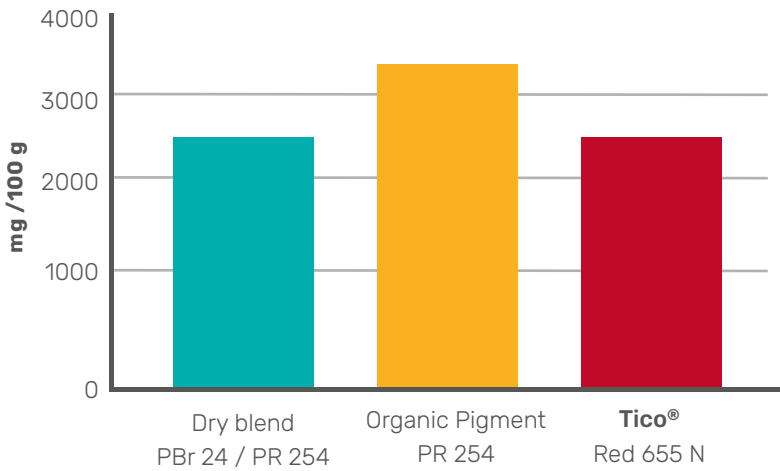

Dusting according to DIN 55992-1

OUTSTANDING PROCESSING CHARACTERISTICS

High-performance organics and inorganic pigments differ significantly with respect to their surface characteristics and their specific weights.

The new technology resolves this problem by its hybrid morphology. TICO® preparations exhibit a significantly reduced dusting during its handling which is the best basis for a perfect manufacturing hygiene.

Due to the pre-dispersed state of its components the TICO® technology also allows significantly shorter grinding times more comparable to that of pure inorganic pigments and less risk for overgrinding and color shift. In comparison to straight blends also the oil absorption can be greatly decreased allowing for high pigment loading in colorant pastes.







CHROMA ENHANCEMENT

The enhancement of chromaticity is an inherent characteristic of the TICO® pigment technology. TICO® achieves e.g. identical color saturation at only 38% organic pigment loading as compared to 67% P.Y. 151 for a titanium dioxide blend.

Besides several technical advantages e.g. increased opacity of the paint film the reduction of the organic content is a great potential cost saver.

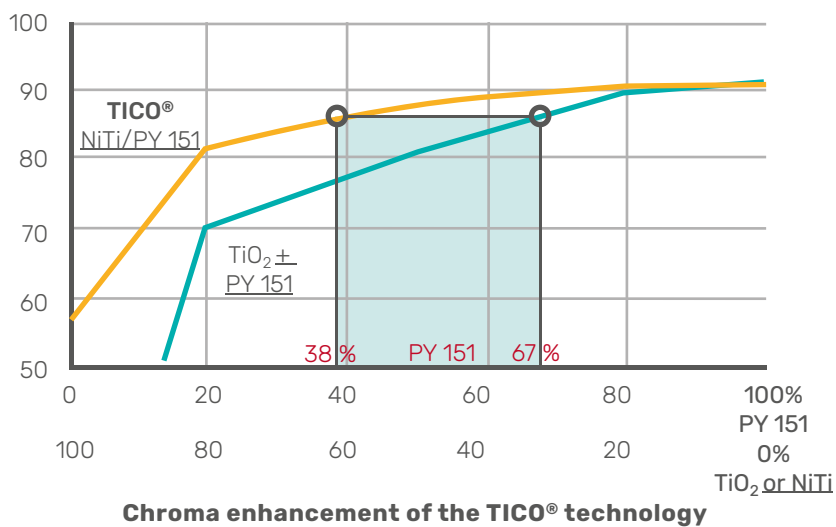

Styrene acrylic resin
12% pigmentation

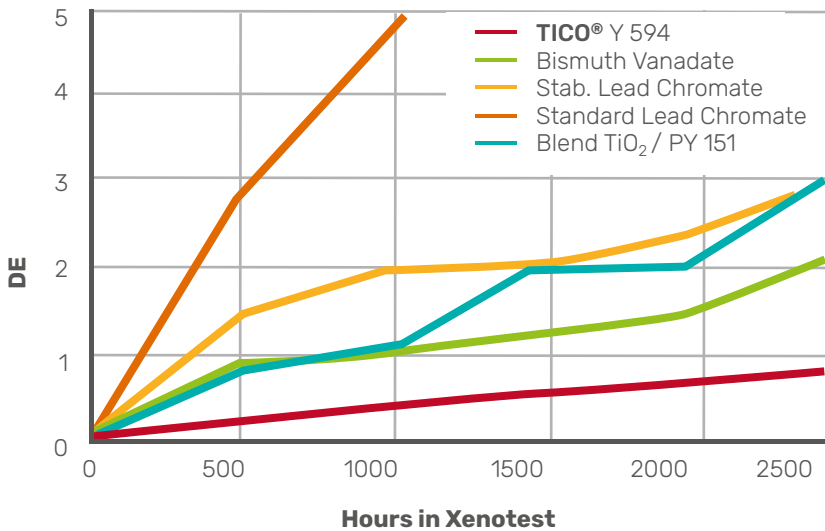

Accelerated weathering results in accordance with DIN EN ISO 11341-1-A

IMPROVED FASTNESS PROPERTIES

In TICO®s the valuable organic pigments are protected by the specially designed titanium carrier pigments, which leads to outstanding light and weather fastness.

As opposed to titanium dioxide, which exhibits photocatalytic activity accounting for weather induced degradation mechanisms, the new titanium carrier pigments of TICO® act like UV-absorbers and protect the sensitive organic pigment from UV-attacks.

VALUE-IN-USE

TICO®s are highly opaque and sufficiently saturated to cover important full shade industry colors like e.g. defined in the RAL register, but also branded shades. Formulation costs with TICO®s are lower if compared to alternative high-performance color solutions.

RAL 3000 [Flame Red]	Lead	TICO®	Vanadate	Organic
Molybdate Red	75.9%			
Pigment Red 52:2	8.2%			
Pigment Orange 36				51.9%
Pigment Red 254			44.6%	
Pigment Red 178				15.7%
Bismuth Vanadate			29.4%	
TICO® Red 655 N		50.2%		
HEUCODUR® 6R		39.7%		
Iron Oxide Red	4.5%	10.1%	17.4%	7.1%
Titanium Dioxide	11.4%		8.6%	25.3%
Cost Ratio	1	3	4	6

Formulations are adjusted in opacity

Technical Data			Density [g/cm ³]	Oil Absorption [g/100g]	Specific Surface [m ² /g]	Acid ¹⁾	Alkali ¹⁾	Overpainting ²⁾	Heat Resistance ³⁾ [°C]	Light Fastness ⁴⁾	Weather Fastness ⁵⁾	Automotive Coatings	General Industrial Coatings	Plastics
Product	Full Shade	Reduction [1:3 TiO ₂]	Physical Data			Fastness Properties						Applications		
TICO® Yellow 588 N			3.5	15	6.1	5	4	5	170	8	5	●●	●●	●
TICO® Yellow 594 ⁶⁾			2.8	19	6.0	5	5	5	200	8	5	●●	●●	
TICO® Yellow 595 N			2.0	28	6.3	5	5	2	140	8	5		●●	
TICO® Yellow 597 N ⁶⁾			2.9	23	6.0	5	5	4 - 5	170	8	5	●●	●●	
TICO® Yellow 622 N ⁶⁾			3.1	20	6.6	5	5	4 - 5	200	8	5	●●	●●	
TICO® Yellow 623			3.2	23	5.1	5	5	5	170	8	5	●●	●●	●
TICO® Orange 640 N			2.6	19	2.7	5	5	4 - 5	220	8	5	●●	●●	●
TICO® Red 642 ⁶⁾			2.3	20	8.7	5	5	5	230	8	5	●●	●●	
TICO® Red 645			3.0	17	6.4	5	5	5	220	8	5	●●	●●	●
TICO® Red 655 N			2.7	21	9.0	5	5	5	220	8	5	●●	●●	●

●● Our Recommendation ● Potential Use

¹⁾ Chemical resistance: Pigment, in a paper filter, is immersed for 24 hours in hydrochloric acid and sodium carbonate solutions of varying concentrations from 0.01 to 10%. Assessment is done using the five step greyscale in accordance with DIN EN ISO 105-A02.

²⁾ Overpainting: Bleeding was rated, of a white alkyd-melamine topcoat on a pigmented 2-comp. acrylate base coat in accordance with DIN EN ISO 105-A02.

³⁾ Heat resistance: Pigment was exposed at different temperatures up to 250°C in an alkyd-melamine baking system for 30 minutes.

Temperature, above which, a noticeable shade change can be observed.

⁴⁾ Light Fastness: Data on resistance to artificial xeno weathering (DIN EN ISO 16474-2, procedure B, cycle 2) is determined in a 2-comp. polyurethane test system similar to DIN EN ISO 105-B02.

⁵⁾ Weather Fastness: Data on resistance to artificial xenon weathering (DIN EN ISO 16474-2, procedure A, cycle 1) is determined in a water based 2-layer test system after 2000 hours weathering time. Rating of change in color in accordance with DIN EN ISO 105-A02.

⁶⁾ Pigments partially contain P.Y. 83 and should not be used at processing temperatures exceeding 200° C due to potential cleavage to 3,3' - dichlorobenzidine (DCB) under these conditions.

Due to limitation of printing process some slight variations between the color as illustrated may be observed.

Guide Formulations

RAL 1003 Signal Yellow

TICO® Yellow 594	52.8 %
TICO® Yellow 622 N	25.4 %
HEUCODUR® Yellow 251	19.5 %
Iron Oxide Yellow	2.3 %



School Bus Yellow

TICO® Yellow 622 N	43.3 %
HEUCODUR® Yellow 6R	53.7 %
Iron Oxide Yellow	3.0 %



RAL 1023 Traffic Orange

TICO® Yellow 622 N	29.1 %
TICO® Orange 640 N	40.0 %
TICO® Red 655 N	2.4 %
HEUCODUR® Yellow 6R	28.5 %



RAL 2004 Pure Orange

TICO® Orange 640 N	100.0 %
--------------------	---------



Tornado Red

TICO® Red 655 N	85.7 %
Pigment Violet 19	14.3 %



RAL 3020 Traffic Red

TICO® Red 655 N	71.4 %
HEUCODUR® Yellow 6R	28.6 %





OUR SERVICE

At Heubach, customer satisfaction comes first. As a supplier of high-quality pigment and pigment preparation solutions we support our customers anywhere where pigments are in use.

With active service centers both globally and regionally we provide our customers with the technical support essential for the implementation of customer-specific requirements and solutions.

Fully equipped technical laboratories and centers enable us to carry out tests for all relevant applications, such as printing inks, paints and coatings, including corrosion protection, coil and powder coatings and plastics.

Custom color adjustments play a significant role both in coatings and plastics applications.

We have extensive expertise in the development of colors for a variety of plastics, paint and coating systems. Depending on fastness properties, application or processing requirements, we can deliver the right color for your application, plastic compounds or even a specific paint system.



Sudarshan Chemical Industries Limited
Registered Office

Eleven West Panchshil, 7th Floor, Survey No. 25,
Near PAN Card Club Road, Baner, Pune 411069 (India)

Board line: +91-20-68281200

www.sudarshan.com

This information corresponds to the present state of our knowledge and is intended as a general description of our products and their possible applications. We make no warranties, express or implied, as to the information's accuracy, adequacy, sufficiency, or freedom from defect and assumes no liability in connection with any use of this information. Any user of this product is responsible for determining the suitability of our products for its particular application. * Nothing included in this information waives any of our General Terms and Conditions of Sale, which control unless it agrees otherwise in writing. Any existing intellectual/industrial property rights must be observed. Due to possible changes in our products and applicable national and international regulations and laws, the status of our products could change. Material Safety Data Sheets providing safety precautions, that should be observed when handling or storing our products, are available upon request and are provided in compliance with applicable law. You should obtain and review the applicable Material Safety Data Sheet information before handling any of these products. For additional information, please contact us.

* For sales to customers located within the United States and Canada the following applies in addition

NO EXPRESS OR IMPLIED WARRANTY IS MADE OF THE MERCHANTABILITY, SUITABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OTHERWISE OF ANY PRODUCT OR SERVICE. 03/2023

™ Trademark

© Trademark registered in many countries